High volume premium water applia	EV9333-40 Exubera Pro CT W	ater Appliance
		BENEFITS
	Exubera Pro CT: EV9333-40	Produces ambient, chilled and chilled carbonated water Combined with Everpure filtration technologies, allows for premium carafe water Capable of supplying water cooled to 38°F-50°F Efficient ice bank technology Durable construction UL Approved
INSTALLATION TIPS	OPERATION TIPS	A P P L I C A T I O N / S I Z I N G
Fill the ice bank before connecting CO2, main water supply or power Flush each dispenser before use Before connecting CO2 run water through dispenser For water pressure regulation install water pressure reducer (calibrated to 43.5 PSI) Ensure John Guest fittings are secure before operation	Use water pressure regulator (supplied) to ensure proper water pressure. Optimal performance requires cleaning machine regularly & performing semi- annual sanitization To ensure the highest quality water, use in combination with an Everpure filtration system CO2 Pressure: 43.5 - 58 PSI A 20 lb CO2 cylinder will provide roughly 400 gallons of carbonated water**	Maximum Cold Water Capacity: 31.7 gph Maximum Continuous Cold Water Capacity: 18.5 gph Suggested tubing: 3/8" OD, 1/4" ID polyethylene tubing
Ventilation required for optimal performance Do not place unit near any heat source To obtain optimal carbonation allow ice bank to form for at least 2 hours. Temperature setting should be between 5 and 7	**Varies based on CO2 pressure, Use water pressure regulator (supplied) to ensure proper water pressure. Optimal performance requires cleaning machine regularly & performing semi- annual sanitization To ensure the highest quality water, use in combination with an Everpure filtration system	

Exubera Pro CT Water Appliance

S P E C I F I C A T I O N S

Overall dimensions: 20"H x 14"W x 24"D

Inlet connections: 3/8" OD John Guest Fittings

Power Supply: 115V, 60Hz, 800W, 12.0Amps

Compressor Power: 1/3 HP

Refrigerant Gas: CFC Free R134a

Maximum Cold Water Capacity: 31.7 gph

Maximum Continuous Cold Water Capacity: 18.5 gph


Shipping Weight: 104 lbs

Operating Weight: 118 lbs

Optimum Water Operating Pressure: 43.5 PSI (3 Bars)

Water Pressure Range: 29 - 43.5 PSI (2 - 3 Bars)

CO2 Pressure Range: 43.5 – 58 PSI (3 – 4 Bars)

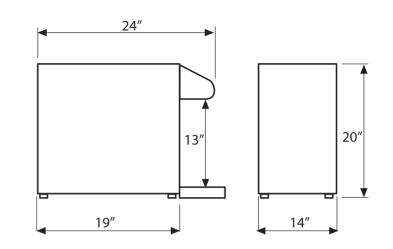

WARRANTY

Everpure water treatment systems (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Everpure will provide a copy of the warranty upon request., Everpure water treatment systems (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Everpure will provide a copy of the warranty upon request., Everpure water treatment systems (excluding replaceable elements) are covered by a limited warranty against defects in material and

Worldwide Headquarters: EVERPURE, LLC 1040 Muirfield Drive Hanover Park, Illinois 60133 Toll Free (800) 323-7873 Tel (630) 307-300 Fax (630) 307-3030 http://www.everpure.com In Europe: Pentair Water Belgium B.V./B.A. Industriepark Wolfstee Toekomstlaan 30 B-2200 Herentals BELGIUM TEL: +32.(0).14.283,500 FAX: +32.(0).14.283,505 In Japan: Hashimoto MN Bldg. 7F 3-25-1 Hashimoto Sagamihara-Shi Kanagawa 229-1103 JAPAN TEL: 81.(0)42.775.3011 FAX: 81.(0)42.775.3015

Everpure 1040 Muirfield Drive Hanover Park, IL 60133